



5°C? 55°C?
No Problem



SINICONTM
SAND
SINICON PP HEATPROOFING PLASTER AGGREGATE
India's First Green Certified

*"A Wonder Plaster and Screed Aggregate
gives Building Longer Life,
Interior Cool during Summer
and Warm during Winter"*



The New Heat Barrier For OLD and NEW Buildings

A Green Product Approved by



5°C? 55°C? No Problem!

Architect | Design FREEDOM

- **No design constrains**
Any design can be made suitable for tropical climate. Easy group housing designs.
- **Goodbye to trussed roof**
No need of truss structure and roof tiles/sheet for heat proofing.
- **Aesthetic Friendly**
Roof tiles, if required, can be mounted on Sinicon Sand plastered slope roof or may be designed to suit the environmental compulsions.
- **Design Flexibility**
Enormous design flexibilities to suit Architect's imagination
- **Light weight**
Additional floors, structures, fire walls etc. can be constructed using Sinicon Sand.

Builder | Execution SAFE & EASY

- **Protects Quality**
Direct replacement for good quality river sand in plastering.
- **Crack free**
Protects structure from developing cracks due to extreme heat.
- **Save Labour & Time**
Better labour output, better surface-finish and speedy completion of project.
- **Easy Transportation & Storage**
Packed and light weight makes handling easy.
- **Save Maintenance Cost**
Reduce maintenance requirements substantially.

Sinicon Sand, a climate control plastering aggregate used like sand in the internal and external plastering (Roof, Wall & Ceiling) of a building. Sinicon Sand ensures cool interior in summer and warm interior in winter making it a perfect material for a future compatible building.

User | Life COMFORT



- Cool Interior during summer
- Warm Interior during winter
- Double the life of a building
- No more plaster cracks/spalling due to extreme heat
- Exceptional thermal insulation
- Energy saving "green" product
- Completely fire proof
- Better acoustics - Good for high traffic area
- Vermine and Termite resistant
- Durable & easy to apply
- Ultra light weight reduces high rise structural building costs
- Application same as like sand, no special skill required
- Permanent solution

Roof (RCC Flat or Slope) Plaster/Screed

Sinicon Sand plaster/screed thickness – Minimum 24 mm or as required to suit the climate condition at the location. Mix Ratio 1:3 (Cement : Sinicon Sand)

Internal / External Wall & Ceiling Plaster

Sinicon Sand plaster thickness – Minimum 12 mm or as required to suit the climate condition at the location. Mix Ratio 1:3 (Cement : Sinicon Sand)



Sinicon Sand
~~Ordinary~~ Sand + Cement + Water = Plaster



Sinicon Controls (P) Limited
marketing@sinicon.net | www.sinicon.net
Toll Free: 1800 425 200 000
Mobile: 94 95 22 11 22



Table of Contents

“Creating liveable space and extending asset value... naturally”


1.	MATERIAL PROPERTIES
1.1	Introduction
1.2	Excellent Thermal Insulator
1.3	Ultra lightweight
1.4	Exceptional Fire Resistance
1.5	Compatibility with Portland Cement and Other Binders
1.6	Superior Strength
1.7	Adhesion (Spray or Plaster)
1.8	Low Water Permeability
1.9	Non-toxic Dust
1.10	Zero Smoke and Zero Fume
1.11	Amazing resistance to spalling
1.12	No weather effect
1.13	Improved Acoustic Properties
1.14	Test Reports / Approvals
1.15	Green Product Certification
2.	PRODUCT PACKAGING
3.	APPLICATION
3.1	Applications of Sinicon Sand
3.2	Suitability Guide
3.3	Typical Properties
3.4	Plastering Yield
3.5	Plaster Mixing Quantities
3.6	Mixing Methods
3.7	Plastering
3.8	Some Very Important Tips
4	Sinicon Sand Cement Plaster Mortar Application Specification Example



1.0 MATERIAL AND PROPERTIES

1.1 Introduction

Sinicon Sand - a heat-proofing plaster and screed aggregate (also known as Sinicon PP Heat Proofing Plaster aggregate) used for plastering and many other applications derived out from unique volcanic glass, a large deposit of which is found at only one location in South Africa and nowhere else on earth. Its properties are similar to classical perlite but it differs in that the processed form is ideally suited for use with cementitious and other binders. It also has truly exceptional fireproofing properties.

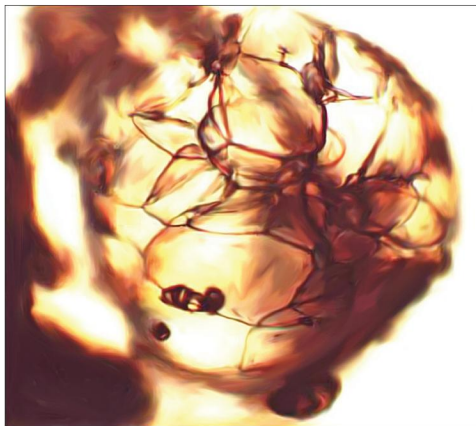

Sinicon Sand Granule (250X magnification)

The volcanic glass ore is crushed and passed through a series of specially developed processing equipments and through this patented process crushed grains are converted into a multitude of well sealed glass beads. It also alters the chemistry of the glass and results in a higher melting point. Under the microscope, each tough bead comprises a froth of glass-walled closed cells each enclosing a near vacuum. Expanded Sinicon Sand is therefore best described as comprising millions of tiny sealed "thermos flasks", hence its absolutely unique and unrivalled insulating and fireproofing properties.

Also visit :

Sinicon Sand – Product introduction & details:
<https://www.youtube.com/watch?v=LTIXdX4HmG8>

1.2 Excellent thermal insulator

The thermal property of Sinicon Sand is very low due to its low density and physical structure. The 'k' value of Sinicon Sand in loose form and when mixed with binders are as follows:

When binders like cement added for plastering application, the K value will be as follows:



a) Sinicon Sand in loose state : 0.05 W/m °C

b) Sinicon Sand : Cement 4.5 : 1 : 0.13 W/m °C
 c) Sinicon Sand : Cement 3 : 1 : 0.15 W/m °C


Note : The 'k' value of a conventional cement plaster is 0.72 W/m °C.

Test Data

1. A Furnace Test in which one panel of the furnace has been removed and replaced by Sinicon Sand panel thickness of 75mm. The furnace has then been put to test for a period of 2 hours and the result has been mentioned in the table below.

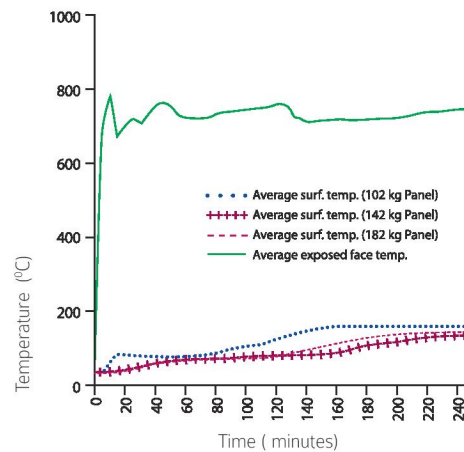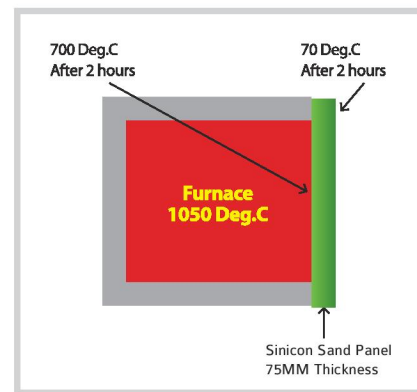

2. A Furnace Test in which an 'I' section has been plastered 30mm thickness of 4.5 : 1 Sinicon Sand : Cement ratio and this 'I' section has been put in a furnace and tested for a period of 2 hours and the result has been mentioned in the table below.

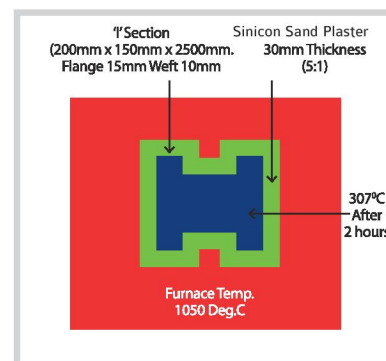

1.3 Ultra lightweight

Density in the loose state is 100 kg/m³ and, when mixed with cement, practical concrete densities ranging from 300 kg/m³ to 1000 kg/m³ can be achieved. The Sinicon Sand concrete will therefore float on water.

The density at various Sinicon Sand : Cement proportion follows:

Ratio 3 : 1 : 770 kg/m³

Ratio 4.5 : 1 : 670 kg/m³

Ratio 6 : 1 : 480 kg/m³

Ratio 10 : 1 : 360 kg/m³

Note : Sand + Cement (4:1) Mortar will have a density of approx. 2000 kg/m³.

1.4 Exceptional Fire Resistance

Notwithstanding the high melting temperature of 1250°C Sinicon Sand concrete can also maintain its structural integrity at high temperatures due to its thermal insulating property. The latter ensures a very high thermal gradient on the outer surface during fire conditions resulting in very low temperatures immediately below the fire exposed surface. Indeed, even if the surface melts, it coalesces into molten glass beads which insulate and protect the interior.

1.5 Compatibility with Portland Cement and Other Binders

Unlike conventional perlite family products which is often friable and delicate with many fractured cells, Sinicon Sand has a well-sealed tough structure. This prevents severe bead damage during mixing and facilitates low water absorption, hence proper curing of the cement.

1.6 Superior Strength

Ultra lightweight concretes are generally weak and, in the case of aerated concrete, are extremely vulnerable to total slump shortly after casting, especially if any vibration or disturbance is present. Sinicon Sand concrete does not rely on air-entrainment and can be cured under any conditions of vibration. Once cured, the product exhibits surprising strength in comparison to other lightweight concretes. Strength varies with density but practical strengths in the range up to 23 MPa are quite achievable.

1.7 Adhesion (Spray or Plaster)

Sinicon Sand, which, when mixed with cement, can be plastered (without the use of additives) either with a trowel or by spray to most common surfaces with good adhesion. In the case of doubtful/smooth surfaces, a recognised cleaning procedure, followed by the application of a bonding agent, i.e a plaster grip primer, is recommended. In this case, Sand plaster will even adhere to smooth steel.

1.8 Low Water Permeability

The Sinicon Sand, when mixed with cement in the correct ratio, can be deemed to be completely watertight without the use of any additives (Ref. PCI Report). Substrate corrosion is therefore minimised.

1.9 Non-toxic Dust

No dust is healthy. Sinicon Sand, due to its amorphous (non-crystalline) structure has however been demonstrated to be a very low health risk dust.

1.10 Zero Smoke and Zero Fumes

Due to its inorganic structure "Sinicon Sand" evolves zero smoke and zero fumes under fire conditions.

1.11 Amazing resistance to spalling

Under fire conditions and, more severely, under water quench conditions following extreme heat, (e.g. from a fire hose) conventional concrete will spall and lose its integrity. Sinicon Sand exhibits no such tendency and, following a fire, the material generally need not be replaced.

1.12 No weather effect

No effect on the structure due to frequent changes in the weather i.e. switching of weather generally affects the conventional plaster and concrete, but has no effect on Sinicon Sand plaster/screed. Substrate corrosion is therefore substantially reduced extending the life of the concrete structure.

1.13 Improved Acoustic Properties

Being a soft material with the vacuum feature in the Sinicon Sand it improves the acoustic properties of the building.

1.14 Test Reports / Approvals

CEPT India, National Test House India, Dubai Test Lab, SABS, CSIR and COMRO and PCI 23 1 4SABS, CSIR, COMRO and PCI Test Reports are available. These include mobile hydrocarbon fire tests, plus density, permeability, smoke emission, strength tests and abrasion tests.

1.15 Green Product Certification

GRIHA

GRIHA V.2015 Criterion : 31

GRIHA V.3 Criterion : 34

SVAGRIHA Criterion : 14

IGBC

Green Pro Certified

2.0 PRODUCT PACKAGING

Sinicon Sand is supplied in 10Kg (100Ltrs) polypropylene Jumbo Bags with detailed mixing instructions.

Note : Volume of 1 cement bag (50w33ltrs. One Sinicon Sand Jumbo Bag is equal to the volume of 3 standard cement bags. Being light weight product Sinicon Sand bag of 100Ltrs is only 10Kg in weight!



Printed instruction on Sinicon Sand bag

SINICON SAND™

SINICON PP HEATPROOFING PLASTER AGGREGATE

MIXING INSTRUCTIONS

Mix Ratio	SINICON SAND	Cement	Water (may vary with cement type)	Approximate Compacted Volumetric Yield
3 : 1 Volume Mix Ratio	Mix Ratio	1 Bag : 1 Bag	For Plaster Mix = 25 to 27 Ltr. For Screed Mix = 25 to 30 (Dry Mix) Ltr.	± 0.092m ³
	Sinicon Sand : Cement	1 Bag : 1 Bag	Water	93 Ltr.
	3 : 1 Mix Ratio by Volume	1 Bag = ± 100 Litres	1 Bag = ± 33 Litres	IMPORTANT! DON'T USE TOO MUCH WATER!
4.5 : 1 Volume Mix Ratio	Mix Ratio	3 Bag : 2 Bag	For Plaster Mix = 24 to 29 Ltr. For Screed Mix = 24 to 29 (Dry Mix) Ltr.	± 0.280m ³
	Sinicon Sand : Cement	3 Bags : 2 Bags	Water	280 Ltr.
	4.5 : 1 Mix Ratio by Volume	3 Bags = ± 300 Litres	2 Bags = ± 66 Litres	IMPORTANT! DON'T USE TOO MUCH WATER!
6 : 1 Volume Mix Ratio	Mix Ratio	2 Bag : 1 Bag	25 to 28 Ltr.	± 0.166m ³
	Sinicon Sand : Cement	2 Bags : 1 Bag	Water	166 Ltr.
	6 : 1 Mix Ratio by Volume	2 Bags = ± 200 Litres	1 Bag = ± 33 Litres	IMPORTANT! DON'T USE TOO MUCH WATER!
10 : 1 Volume Mix Ratio	Mix Ratio	7 Bags : 2 Bags	134 to 170 Ltr.	± 0.851m ³
	Sinicon Sand : Cement	7 Bags : 2 Bags	Water	651 Ltr.
	10 : 1 Mix Ratio by Volume	7 Bags = ± 700 Litres	2 Bags = ± 66 Litres	IMPORTANT! DON'T USE TOO MUCH WATER!

Note 1 : For plaster mixes grade 32.5n CEM 11 (or higher) cement is recommended.
 Note 2 : During plaster application PRESS APPLY the mix on the wall/ceiling/roof surfaces.
 Note 3 : Sinicon Sand screeds must be thoroughly compacted before allowing to dry. Inadequate compaction will result in a reduction of final compressive strength.

SINICON SAND SUITABILITY GUIDE

TYPICAL APPLICATIONS	3 : 1 Volume Mix	4 1/2 : 1 Volume Mix	6 : 1 Volume Mix	10 : 1 Volume Mix
PLASTER - EXTERNAL	✓	✗	✗	✗
PLASTER - INTERNAL	✓	✓	✗	✗
LIGHTWEIGHT SCREEDS	✓	✓	✗	✗
BUILT - UP FLOORS	✓	✓	✗	✗
INSULATING ROOF DECKS	✓	✓	✓	✗
FIRE SEALS	✓	✓	✓	✓
CASTABLES	✓	✓	✓	✓
SPRAY APPLICATIONS	✓	✓	✓	✗
CAST THERMAL INSULATION	✗	✗	✓	✓

✓ = Suitable

✗ = Not Suitable

For more details visit : www.sinicon.net Made In South Africa

3.0 APPLICATION


Also visit :

Sinicon Sand – Mixing & Application procedure:

<https://www.youtube.com/watch?v=vOHWrNfwr7Y>

3.1 Applications of Sinicon Sand

- 1) External and internal plastering
- 2) Heat proofing/insulating roof decks.
- 3) Light weight concrete screed for metal roof.
- 4) Building up of floors
- 5) Fire proofing of structures and fire seals
- 6) Pre-cast Items
- 7) Cast thermal insulations
- 8) Architectural design applications
- 9) As loose-fill (without cement) to fill cavities for thermal insulation purposes.

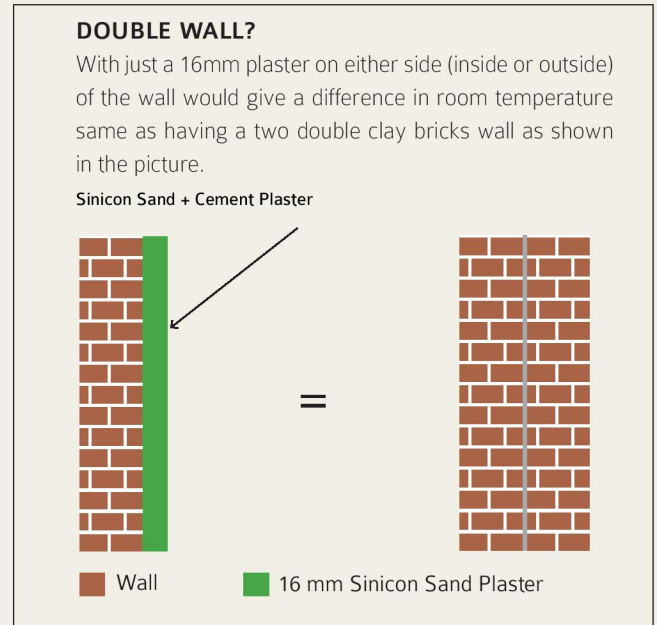

3.2 Suitability guide

Mix Ratio (by volume) Sinicon Sand : Cement	3:1 1 Bag Sinicon Sand (100l) + 1 Bag OPC (33l)	4.5:1 1.5 Bag Sinicon Sand (150l) + 1 Bag OPC (33l)	6:1 2 Bag Sinicon Sand (200l) + 1 Bag OPC (33l)	10:1 3.5 Bag Sinicon Sand (350l) + 1 Bag OPC (33l)
External Plaster/Roof Screed	√	x	x	x
Internal Plaster	√	√	x	x
Built -up Floors	√	√	x	x
Insulating roof decks	x	√	√	x
Fire Seals	√	√	√	√
Castables	√	√	√	√
Spray Applications	√	√	√	x
Cast Thermal Insulation	x	x	√	√

Note: Before selecting a mix, check structural design and properties.
 "OPC" = Ordinary Portland Cement √ = suitable X= Not suitable

3.3 Typical Properties

See below table.

- 1 Recommended water content as indicated in bold however, for plastering and casting application use higher water content.
- 2 The data in the table is expected values using quality OPC, standard mixing times, proper curing practice and correct water ratio.
- 3 Important Note: The water : cement ratio is very important. Numbers shown are per 100 Ltr. of Sinicon Sand.

Mix Ratio (by volume) Sinicon Sand : Cement	3:1 1 Bag Sinicon Sand (100l) + 1 Bag OPC 50Kg (33l)		4.5:1 1.5 Bag Sinicon Sand (150l) + 1 Bag OPC 50Kg (33l)		6:1 2 Bag Sinicon Sand (200l) + 1 Bag OPC 50Kg (33l)		10:1 3.5 Bag Sinicon Sand (350l) + 1 Bag OPC 50Kg (33l)	
	Low Water	High Water	Low Water	High Water	Low Water	High Water	Low Water	High Water
Water (l) per 10kg (100l) bag of Sinicon Sand	23	29	19.2	24.2	19.2	24.2	19.2	24.2
Slump (mm)	55	250	45	240	50	230	30+	90+
Flow (mm)	370	635	380	580	365	365	355	570
Measured Air Content (%)	12	16	15	18	21	21	22	21
Drying Shrinkage (%)	0.17	0.16	0.18	0.19	0.16	0.16	0.12	0.12
Watering Expansion (%)	0.14	0.14	0.17	0.17	0.15	0.14	0.1	0.1
7 day ISO flexural strength (Mpa)	3.7	1.9	3.4	2.0	1.5	1.1	-	-
28 day ISO flexural strength (Mpa)	4.9	2.7	4.2	2.5	1.8	1.3	-	-
7 day ISO compressive strength (Mpa)	14.2	5	12.6	5.2	3.9	3.9	-	-
28 day ISO compressive strength (Mpa)	19.8	7.5	16.9	6.3	4.4	2.9	-	-
7 day 100mm cube strength (Mpa)	16.9	7.3	15.6	6.9	4.7	3.1	1.2	0.8
28 day 100mm cube strength (Mpa)	23	10	19	8.7	6	4.3	1.7	1.4
Wet Density (Kg/m ³)	1400	1150	1250	1000	900	800	750	700
Dry Density (Kg/m ³)	1100	900	800	650	550	450	360	350

3.4 Typical Plastering Yield

Approximately 11 bags of Sinicon Sand will be required for each cubic metre (M³) of concrete/plaster to be mixed (cement and water to be added to this quantity of Sinicon Sand). This applies to all mixes mentioned in the table of Typical Properties above.


In the cases of general plastering applications, one Jumbo

Bag of Sinicon Sand can give the following plastering yield.

- 1) Plaster Mix for internal/external wall and ceiling plaster - Sinicon Sand : Cement (3 : 1) at 12mm thickness is **85 Sq. Ft.**
- 2) Plaster Mix for roof plaster (Screed)- Sinicon Sand : Cement (3 : 1) at 24mm thickness is **42 Sq. Ft.**

3.5 Plaster Mixing Quantities (General use)

1. A plaster mixing of Sinicon Sand : Cement at 3 : 1 ratio (by Volume) is as follows:

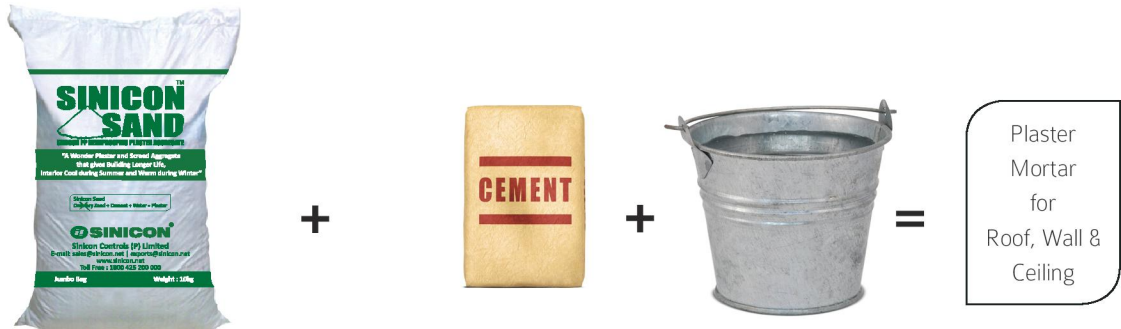

1 X 100Ltr. (10Kg) Sinicon Sand Jumbo Bag 1 X 33Ltr (50Kg) Cement 29 Ltr* Water

* Use water to suit workability.

* Lower the water content better the result.

3.6 Plaster Mixing Methods

1. General : All the principles of good concrete practice apply to Sinicon Sand mixes
2. Equipment : A mechanical means of mixing is suggested. A pan mixer is preferable as a drum mixer tends to make balls. If this equipment is not available, manual mixing with shovels is acceptable. (As Sinicon Sand is a non-absorbent volcanic glass, water will not be absorbed into the material. The use of a sealed, leak proof

container is, therefore, recommended to prevent leaching of the required amount of water).

3. Mixing
 - a. Mix Sinicon Sand and cement in the dry state first (a little water may be used to dampen slightly in order to suppress dust).
 - b. Add the correct amount of water (refer to the Typical Property Table and note that the water quantity is given in litres per 100Ltr of Sinicon Sand). The

Wall



Roof



product may appear very dry, especially if hand-mixed, but this is correct. It is important to monitor the amount of water added since small differences in water content have a large effect on overall consistency and slump.

- c. Mix, but do not overdo, mixing time - about 30 seconds in a pan mixer is all that is required (longer mixing entrains too much air).

3.7 Plastering

1. Use conventional plastering methods for plastering Sinicon Sand plaster, however, press apply the plaster on the surface instead of throwing.



2. Guniting : Sinicon Sand concrete may also be guniting. Because lower air velocities are used than for ordinary guniting procedures, the rebound is lower. A further advantage is that the rebound can be re-used.

3.8 Some Very Important Tips

1. The water content is extremely important. Too much water will yield poor results and lead to shrinkage, weak concrete and cracking. Use only the water per Typical Properties table.
2. When plastering, use good conventional plastering techniques. Particular attention should be paid to the degree to which the plaster has set prior to levelling with straight edge. As with any plaster, it should be set sufficiently so that it is difficult to cause an indentation by applying thumb pressure. If the straight edge is applied prematurely, it will cause the plaster to de-bond from the wall and slump cracks

will form. On smooth surfaces, use Sinicon Pratley plaster grip primer.

3. As with any concrete screed or plaster, proper curing under damp conditions and out of direct sunlight is vital for success.
4. The application will determine the exact water : cement ratio. For example - for casting and plastering applications, the user may decide to use the high water content (refer to the Typical Properties table) whereas for screeds a drier consistency and stronger product may be preferred, hence the low water content may be chosen.
5. Once applied, the surface must be kept moist for the first 14 days while curing. If the finished product is to be exposed to direct sunlight or fast cured, contact our office for advice on specialised additives.

4.0 HOW A SINICON SAND CEMENT PLASTER MORTAR APPLICATION SPECIFICATION (EXAMPLE) TO BE PRESCRIBED?

4.1 Wall and Ceiling Plastering

Provide and apply 12mm thick single coat internal, external and ceiling plaster with Sinicon Sand and cement heat proofing mortar at a ratio of 3:1 (Sinicon Sand : Cement) with adequate water content for all plan / curved surfaces of brick / block / RCC Walls and finishing the same in correct line, level & plumb, making of edges, corners, sill, grooves etc. As per drawings & relevant specifications including all necessary surfaces preparations as per Sinicon Sand heat proofing plastering methods; cleaning with wire brush to remove fungus/ dusts, hacking of surfaces to receive plaster if surface is smooth, wetting and cement grouting of surfaces, curing after application for 14 days, cleaning etc. complete at all levels and all heights. Apply base coat and top coat painting as per specification.

4.2 Roof Plastering (Screeding)

Provide and apply minimum 24mm thick single coat roof plaster (screed) with Sinicon Sand and cement mortar at a mix ratio of 3:1 (Sinicon Sand : Cement) with adequate water content for all plain/slope surface of RCC roof and finishing the same in correct gradient to ensure water is not accumulated anywhere on the roof surface and the corners joints / junctions of roof and retain wall chambered to avoid water seepage as per Sinicon Sand heat proofing plastering methods; cleaning with wire brush to remove fungus / dusts, hacking of concrete surface to receive plaster, surface washing, wetting and cement grouting of surface, curing after application for 14 days, cleaning etc compete at all the roof surfaces. Apply base coat of white cement as per specification.

Note:- This brochure is subject to changes without notice.

ATTENTION BUILDERS & CONTRACTORS

PROBLEMS

- Cracks?
- Leakage/Seepage?
- Spalling?
- Faster Aging of Buildings?

REASONS

Mechanical and Physical properties of building structures are suddenly deteriorated due to the **Excessive Heat Absorption of Building Structure** and also due to Tropical Climate. Usage of materials such as M sand, Rock Sand etc. that absorbs large amount of thermal energy add to the problems.

The influence of excessive heat on the concrete structures are :

- **Stress and Strain characteristics** increases thus leads to loss of stiffness in concrete.
- **Modulus Elasticity** decreases causing cracks in concrete.
- **Compressive Strength** decreases leads to loss of structural integrity thus negatively affect the load bearing capacity.
- **Tensile Strength** decreases leads to cracking.
- **Shrinkage and creep** increases resulting cracks.
- **Concrete – Steel reinforcement Bond strength** decreases.
- **Radiation Shielding Effectiveness** decreases.

REMEDY

Plaster/Screed your valuable building structure with SINICON SAND, and get rid of all the problems almost completely. Sinicon Sand also protect moisture absorption hence substantially reduces the corrosion in the reinforcement steel, increasing building life.

“SINICON SAND makes your building structure remain strong in all weather and provides the building interior cool during summer and warm during winter”.

Sinicon Sand ON, Building is STRONG

Toll Free : 1800 425 200 000

 **SINICON**[®]

Sinicon Controls (P) Limited
marketing@sinicon.net | www.sinicon.net
Mobile: 94 95 22 11 22





Sinicon Controls (P) Limited
G1/10, VGN Royal Grande VGN Royal Enclave Extension
5th Cross Street Paruthipattu, Avadi, Chennai - 600 071 Tamilnadu, India
Tel.: +91 44 42147290

Regd. Office: Sinicon House, XVII/906, IDA, Kanjikode West
Palakkad - 678 623, Kerala, India
Tel.: +91 491 2569979, 2569981

Mob.: +91 94 95 22 11 22
TollFree : 1800 425 200 000

marketing@sinicon.net
www.sinicon.net